

YG-1 CO., LTD.

HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

Http://www.yg1.kr

E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.

YouTube **f** **in** **we** **tw**
Search 'YG-1' on social media outlets

YG1YEP190826004

YG
V7 Plus

**HIGH PERFORMANCE
SOLID CARBIDE END MILLS**
For Steels, Cast Iron and Stainless Steels

PRODUCT FEATURES



- Chatter and Harmonics Reduced for **Improved Stability and Better Finishing**
- Special Design of Flute Geometry for **Optimal Chip Formation and Chip Evacuation**
- Engineered Coating Technology to **Reduced Wear and Increase Heat Resistance**
- Enhanced Corner Geometry for **Longer Tool Life**

PRODUCT GEOMETRY




V7 PLUS 6 FLUTE END MILLS



THE BEST CHATTER FREE TOOL FOR HIGH SPEED


- Unique geometry of the variable pitch provides the best chatter free tool for high speed and also trochoidal milling
- Several slot widths can be used with the same tool diameter in an efficient way
- Provides longer tool life and higher productivity on most materials
- Trochoidal milling is a programming technique applying a small radial width of cut with also higher cutting speed and feed per tooth

Trochoidal Milling performs better than conventional ways because it has..

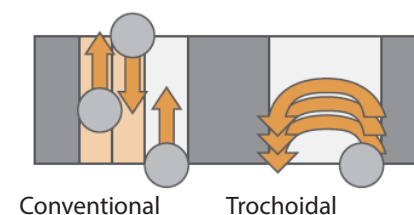

- Lower Cutting Force from smaller arc engagement
- Longer Tool Life from more flutes, and deeper cutting depth
- Higher Stability, Lower Vibration and Excellent Chip Evacuation

V7 PLUS 6 FLUTE CHIP SPLITTER **NEW**

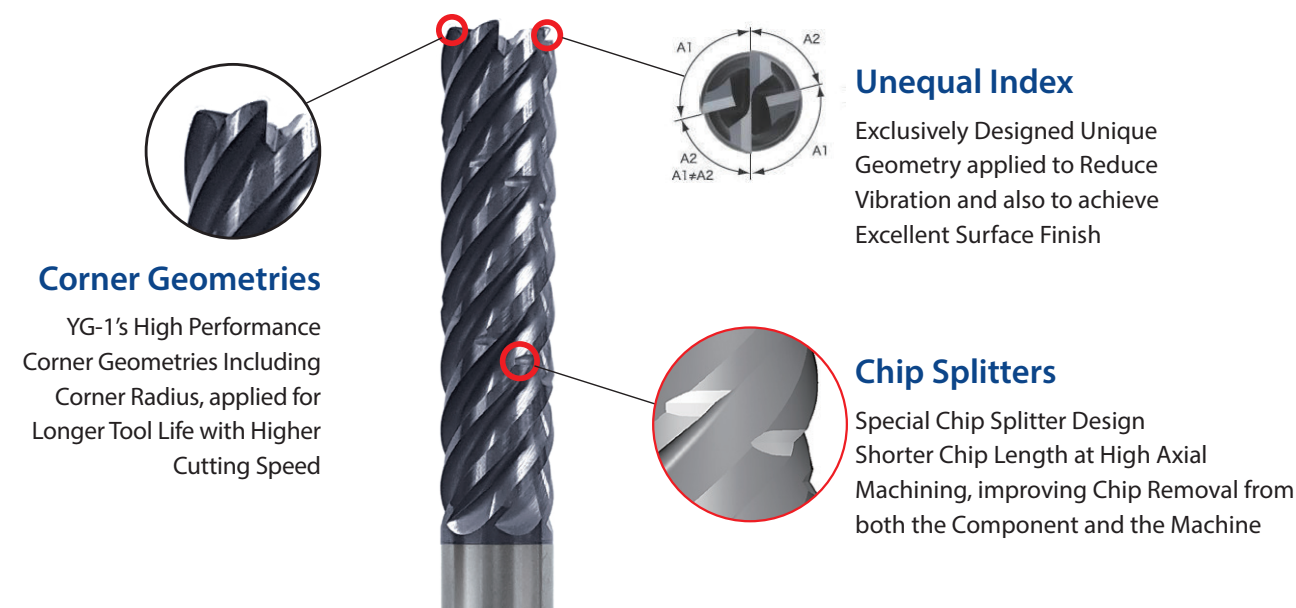


GUIDE LINE TO ICONS

Tool Raw Material



Helix Angle



No. of Flutes



Tolerance of Ball Radius



Type of Shank



Chamfer Angle






Cutting Condition Pages



CASE STUDY


V7 Plus 4 Flute vs Competitor

	V7 Plus	Competitor
Wear(μm)	83.518	203.381
Milling Length(m)	49	49
Size(mm)	Ø10 x Ø10 x 22 x 72	
Work Material	-DIN: C45 -WR: 1.0503 -JIS: S45C (HRC 30 / HB 286)	
Cutting Speed	230.09 m/min.	
RPM	7,324 rev./min.	
Feed	1,464 mm/min.	
Feed per tooth	0.05 mm/tooth	
Milling Method	Down & Side Cutting	
Milling Depth	Axial: 10 mm, Radial: 3 mm	
Coolant	Wet Cut	
Overhang	34 mm	
Machine	Machining Center	

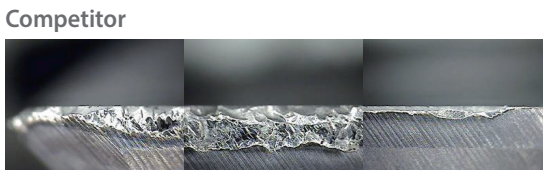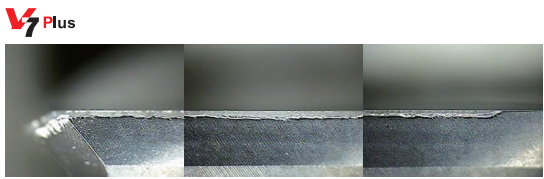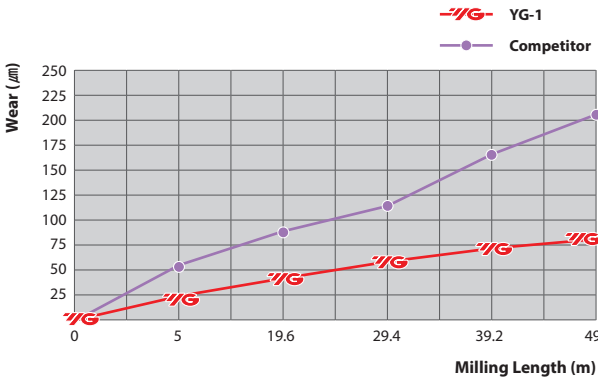

V7 Plus 4 Flute vs Competitor




	V7 Plus	Competitor
Wear(μm)	81.485	183.296
Milling Length(m)	58.8	58.8
Size(mm)	Ø16 x Ø16 x 32 x 92	
Work Material	-DIN: C45 -WR: 1.0503 -JIS: S45C (HRC 30 / HB 286)	
Cutting Speed	160.00 m/min.	
RPM	3,183 rev./min.	
Feed	573 mm/min.	
Feed per tooth	0.05 mm/tooth	
Milling Method	Down & Side Cutting	
Milling Depth	Axial: 14 mm, Radial: 3 mm	
Coolant	Wet Cut	
Overhang	45 mm	
Machine	Machining Center	

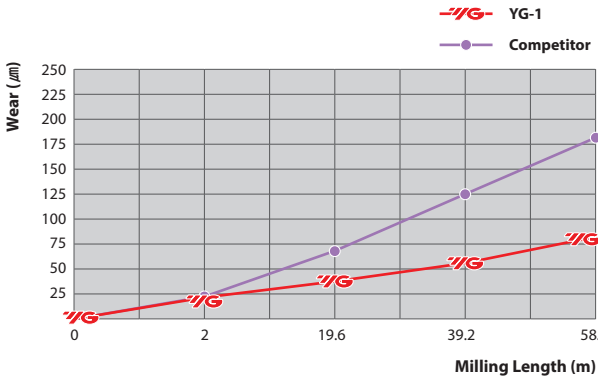

CASE STUDY




V7 Plus 6 Flute Chip Splitter vs Competitor

	V7 Plus	Competitor
Wear(μm)	32.49	88.26
Milling Length(m)	310	155
Size(mm)	Ø12 x Ø12 x 48 x 120 with chip Splitter	
Work Material	-DIN: C45 -WR: 1.0503 -JIS: S45C (HRC 30 / HB 286)	
Cutting Speed	220.01 m/min.	
RPM	5,836 rev./min.	
Feed	3,151 mm/min.	
Milling Method	Trochoidal Cutting	
Milling Depth	Axial: 36mm, Radial: 0.6 mm	
Coolant	Wet Cut	
Overhang	56 mm	
Machine	Machining Center	

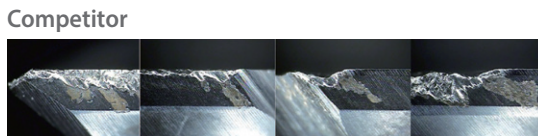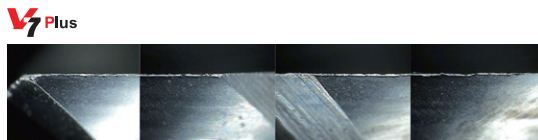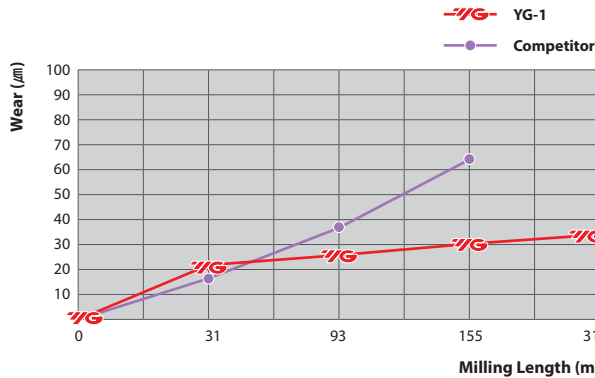

V7 Plus 6 Flute vs Competitor

	V7 Plus	Competitor
Milling Length(m)	360	300
Size(mm)	Ø12(R1) x Ø12 x 26 x 83	
Work Material	-DIN: C45 -WR: 1.0503 -JIS: S45C (HRC 30 / HB 286)	
Cutting Speed	278.67 m/min.	
RPM	7,392 rev./min.	
Feed	7,495 mm/min.	
Feed per tooth	0.17 mm/tooth	
Milling Method	Trochoidal Cutting	
Milling Depth	Axial: 24 mm(2D), Radial: 0.6 mm(0.05D)	
Coolant	Wet Cut	
Overhang	36 mm	
Machine	Machining Center	

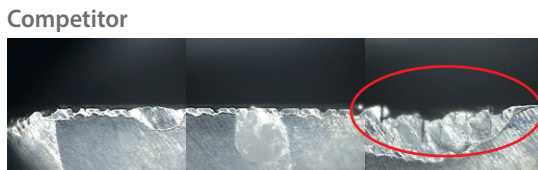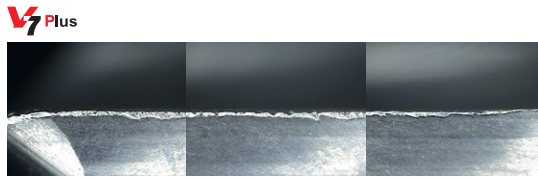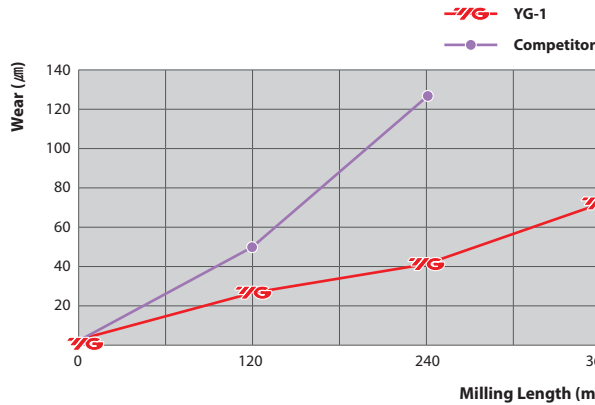

Please visit
globalyg1.com/material
for material search



HIGH PERFORMANCE
SOLID CARBIDE END MILLS
For Steels, Cast Iron and Stainless Steels


◎ : Excellent ○ : Good										
ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC				
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎	◎
	2		About 0.45% C	Annealed	190	13	◎	◎	◎	◎
	3		About 0.45% C	Quenched & tempered	250	25	◎	◎	◎	◎
	4		About 0.75% C	Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C	Quenched & tempered	300	32	◎	◎	◎	◎
	6	Low alloy steel		Annealed	180	10	◎	◎	◎	◎
	7			Quenched & tempered	275	29	◎	◎	◎	◎
	8			Quenched & tempered	300	32	◎	◎	◎	◎
	9			Quenched & tempered	350	38	◎	◎	◎	◎
	10	High alloyed steel, and tool steel		Annealed	200	15	◎	◎	◎	◎
	11			Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	◎	◎	◎	◎
	13		Martensitic	Quenched & Tempered	240	23	◎	◎	◎	◎
	14			Austenitic	180	10	◎	◎	◎	◎
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎	◎
	16		Pearlitic (Martensitic)		260	26	◎	◎	◎	◎
	17	Nodular cast iron	Ferritic		160	3	◎	◎	◎	◎
	18		Pearlitic		250	25	◎	◎	◎	◎
	19	Malleable cast iron	Ferritic		130		◎	◎	◎	◎
	20		Pearlitic		230	21	◎	◎	◎	◎
N	21	Aluminum-wrought alloy	Not Curable		60					
	22		Curable Hardened		100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75					
	24		≤ 12% Si, Curable Hardened		90					
	25		> 12% Si, Not Curable		130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110					
	27		CuZn, CuSnZn (Brass)		90					
	28		CuSn, lead-free copper and electrolytic copper		100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	○	○	○	○
	32			Cured	280	30	○	○	○	○
	33			Annealed	250	25	○	○	○	○
	34		Ni or Co Based	Cured	350	38	○	○	○	○
	35			Cast	320	34	○	○	○	○
	36	Titanium Alloys	Pure Titanium		400 Rm		○	○	○	○
	37		Alpha + Beta Alloys	Hardened	1050 Rm		○	○	○	○
H	38	Hardened steel		Hardened	550	55				
	39			Hardened	630	60				
	40	Chilled Cast Iron		Cast	400	42				
	41	Hardened Cast Iron		Hardened	550	55				

GMF52 GMF53	GMF56 GMF57	GMF60 GMF61	GMG16 GMG17	GMG18 GMG19	GMH58 GMH59	GMG12 GMG13	GMG14 GMG15	GMH56 GMH57	EMB72 EMB73
4	4	4	6	6	6	6	6	6	5
35°/37°	35°/37°	35°/37°	45°	45°	45°	45°	45°	45°	41°~45°
SQUARE	SQUARE	SQUARE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE	SQUARE
D3.0	D3.0	D3.0	D6.0	D6.0	D6.0	D6.0	D6.0	D6.0	D6.0
D20.0	D25.0	D20.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0
14	15	16	18	19	21	23	24	25	26
SHORT LENGTH	LONG LENGTH	LONG LENGTH with NECK	LONG LENGTH	EXTRA LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH	EXTRA LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH
Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	AlTiN
					CHIP SPLITTER  NEW			CHIP SPLITTER  NEW	 V7 INOX
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE BALL NOSE

GMG55 PLAIN SHANK
GMG56 FLAT SHANK

- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

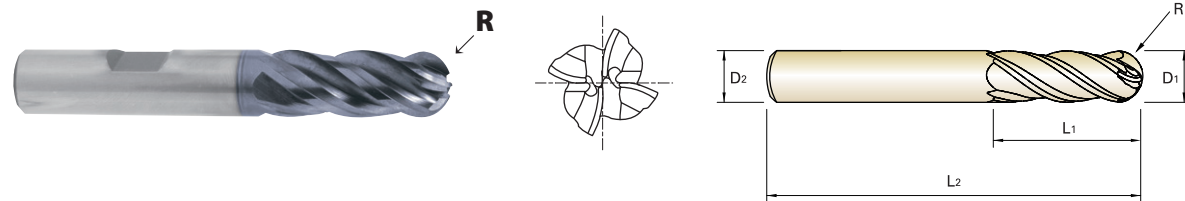

Unit : mm

EDP No.		Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R (±0.02)	D1	D2	L1	L2
GMG55030	GMG56030	R1.5	3.0	6	8	57
GMG55040	GMG56040	R2.0	4.0	6	11	57
GMG55050	GMG56050	R2.5	5.0	6	13	57
GMG55060	GMG56060	R3.0	6.0	6	13	57
GMG55080	GMG56080	R4.0	8.0	8	19	63
GMG55100	GMG56100	R5.0	10.0	10	22	72
GMG55120	GMG56120	R6.0	12.0	12	26	83
GMG55160	GMG56160	R8.0	16.0	16	32	92
GMG55200	GMG56200	R10.0	20.0	20	38	104
GMG55250	GMG56250	R12.5	25.0	25	38	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5 * Shank Dia. ≥ Ø12: h6
Over Ø12	0 ~ - 0.03	

◎ : Excellent ○ : Good


ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎		◎		◎		◎		◎	◎	◎		◎		◎	◎		◎	◎	◎	

ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast iron	Hardened Cast iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○	○	○	○	○	○	○				

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE CORNER RADIUS SHORT LENGTH

GMF54 PLAIN SHANK
GMF55 FLAT SHANK

- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

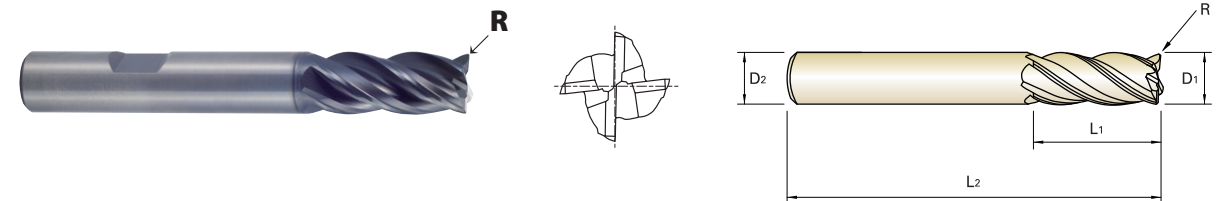

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMF54030	GMF55030	R0.3	3.0	6	7	54
GMF54901	GMF55901	R0.5	3.0	6	7	54
GMF54040	GMF55040	R0.3	4.0	6	8	54
GMF54902	GMF55902	R0.5	4.0	6	8	54
GMF54050	GMF55050	R0.3	5.0	6	10	54
GMF54903	GMF55903	R0.5	5.0	6	10	54
GMF54060	GMF55060	R0.3	6.0	6	10	54
GMF54904	GMF55904	R0.5	6.0	6	10	54
GMF54905	GMF55905	R1.0	6.0	6	10	54
GMF54080	GMF55080	R0.5	8.0	8	12	58
GMF54906	GMF55906	R1.0	8.0	8	12	58
GMF54100	GMF55100	R0.5	10.0	10	14	66
GMF54907	GMF55907	R1.0	10.0	10	14	66
GMF54120	GMF55120	R0.5	12.0	12	16	73
GMF54908	GMF55908	R1.0	12.0	12	16	73
GMF54909	GMF55909	R2.0	12.0	12	16	73
GMF54140	GMF55140	R0.5	14.0	14	18	75
GMF54160	GMF55160	R1.0	16.0	16	22	82
GMF54912	GMF55912	R2.0	16.0	16	22	82
GMF54913	GMF55913	R3.0	16.0	16	22	82
GMF54180	GMF55180	R1.0	18.0	18	24	84
GMF54200	GMF55200	R1.0	20.0	20	26	92
GMF54916	GMF55916	R2.0	20.0	20	26	92
GMF54917	GMF55917	R3.0	20.0	20	26	92

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5 * Shank Dia. ≥ Ø12: h6
Over Ø12	0 ~ - 0.03	

◎ : Excellent ○ : Good


ISO	P										M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron		Hardened Cast iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended											○	○	○	○	○								

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE CORNER RADIUS LONG LENGTH

GMF58 PLAIN SHANK
GMF59 FLAT SHANK

- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

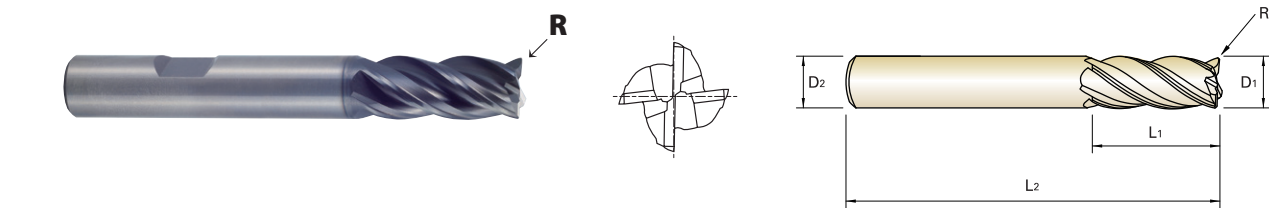

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMF58030	GMF59030	R0.3	3.0	6	8	57
GMF58901	GMF59901	R0.5	3.0	6	8	57
GMF58040	GMF59040	R0.3	4.0	6	11	57
GMF58902	GMF59902	R0.5	4.0	6	11	57
GMF58050	GMF59050	R0.3	5.0	6	13	57
GMF58903	GMF59903	R0.5	5.0	6	13	57
GMF58060	GMF59060	R0.3	6.0	6	13	57
GMF58904	GMF59904	R0.5	6.0	6	13	57
GMF58905	GMF59905	R1.0	6.0	6	13	57
GMF58080	GMF59080	R0.5	8.0	8	19	63
GMF58906	GMF59906	R1.0	8.0	8	19	63
GMF58100	GMF59100	R0.5	10.0	10	22	72
GMF58907	GMF59907	R1.0	10.0	10	22	72
GMF58120	GMF59120	R0.5	12.0	12	26	83
GMF58908	GMF59908	R1.0	12.0	12	26	83
GMF58909	GMF59909	R2.0	12.0	12	26	83
GMF58140	GMF59140	R0.5	14.0	14	26	83
GMF58160	GMF59160	R1.0	16.0	16	32	92
GMF58912	GMF59912	R2.0	16.0	16	32	92
GMF58913	GMF59913	R3.0	16.0	16	32	92
GMF58180	GMF59180	R1.0	18.0	18	32	92
GMF58200	GMF59200	R1.0	20.0	20	38	104
GMF58916	GMF59916	R2.0	20.0	20	38	104
GMF58917	GMF59917	R3.0	20.0	20	38	104
GMF58250	GMF59250	R1.0	25.0	25	38	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5 * Shank Dia. ≥ Ø12: h6
Over Ø12	0 ~ - 0.03	


◎ : Excellent ○ : Good

ISO	P										M				K			
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S				H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	40	41	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550
Recommended											○	○	○	○	○	○	○	

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE CORNER RADIUS WITH NECK

GMF62 PLAIN SHANK
GMF63 FLAT SHANK

- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

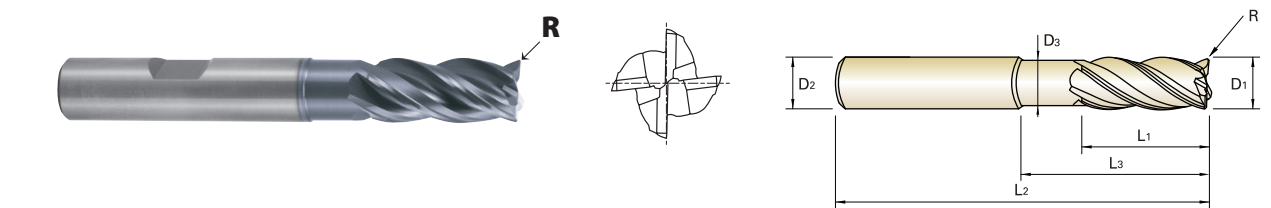

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62030	GMF63030	R0.3	3.0	6	7	12	54	2.7
GMF62901	GMF63901	R0.5	3.0	6	7	12	54	2.7
GMF62902	GMF63902	R0.3	3.0	6	7	17	57	2.7
GMF62903	GMF63903	R0.5	3.0	6	7	17	57	2.7
GMF62040	GMF63040	R0.3	4.0	6	8	15	57	3.7
GMF62904	GMF63904	R0.5	4.0	6	8	15	57	3.7
GMF62905	GMF63905	R0.3	4.0	6	8	22	63	3.7
GMF62906	GMF63906	R0.5	4.0	6	8	22	63	3.7
GMF62050	GMF63050	R0.3	5.0	6	10	17	57	4.7
GMF62907	GMF63907	R0.5	5.0	6	10	17	57	4.7
GMF62908	GMF63908	R0.3	5.0	6	10	27	67	4.7
GMF62909	GMF63909	R0.5	5.0	6	10	27	67	4.7
GMF62060	GMF63060	R0.3	6.0	6	10	15	57	5.5
GMF62910	GMF63910	R0.5	6.0	6	10	15	57	5.5
GMF62911	GMF63911	R1.0	6.0	6	10	15	57	5.5
GMF62912	GMF63912	R0.3	6.0	6	10	20	62	5.5
GMF62913	GMF63913	R0.5	6.0	6	10	20	62	5.5
GMF62914	GMF63914	R1.0	6.0	6	10	20	62	5.5
GMF62915	GMF63915	R0.3	6.0	6	10	32	74	5.5
GMF62916	GMF63916	R0.5	6.0	6	10	32	74	5.5
GMF62917	GMF63917	R1.0	6.0	6	10	32	74	5.5
GMF62080	GMF63080	R0.5	8.0	8	12	20	63	7.5
GMF62918	GMF63918	R1.0	8.0	8	12	20	63	7.5
GMF62919	GMF63919	R0.5	8.0	8	12	30	73	7.5

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5 * Shank Dia. ≥ Ø12: h6
Over Ø12	0 ~ - 0.03	


◎ : Excellent ○ : Good

ISO	P										M				K			
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S				H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	40	41	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550
Recommended											○	○	○	○	○	○	○	

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE CORNER RADIUS WITH NECK

GMF62 PLAIN SHANK
GMF63 FLAT SHANK

- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

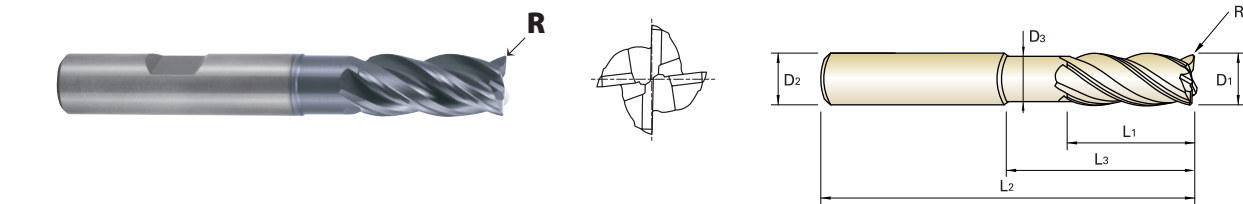

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62920	GMF63920	R1.0	8.0	8	12	30	73	7.5
GMF62921	GMF63921	R0.5	8.0	8	12	46	90	7.5
GMF62922	GMF63922	R1.0	8.0	8	12	46	90	7.5
GMF62100	GMF63100	R0.5	10.0	10	14	25	72	9.2
GMF62923	GMF63923	R1.0	10.0	10	14	25	72	9.2
GMF62924	GMF63924	R0.5	10.0	10	14	35	82	9.2
GMF62925	GMF63925	R1.0	10.0	10	14	35	82	9.2
GMF62926	GMF63926	R0.5	10.0	10	14	55	102	9.2
GMF62927	GMF63927	R1.0	10.0	10	14	55	102	9.2
GMF62120	GMF63120	R0.5	12.0	12	16	30	83	11.0
GMF62928	GMF63928	R1.0	12.0	12	16	30	83	11.0
GMF62929	GMF63929	R2.0	12.0	12	16	30	83	11.0
GMF62930	GMF63930	R0.5	12.0	12	16	40	93	11.0
GMF62931	GMF63931	R1.0	12.0	12	16	40	93	11.0
GMF62932	GMF63932	R2.0	12.0	12	16	40	93	11.0
GMF62933	GMF63933	R0.5	12.0	12	16	64	117	11.0
GMF62934	GMF63934	R1.0	12.0	12	16	64	117	11.0
GMF62935	GMF63935	R2.0	12.0	12	16	64	117	11.0
GMF62160	GMF63160	R1.0	16.0	16	22	38	92	15.0
GMF62936	GMF63936	R2.0	16.0	16	22	38	92	15.0
GMF62937	GMF63937	R3.0	16.0	16	22	38	92	15.0
GMF62938	GMF63938	R1.0	16.0	16	22	55	109	15.0
GMF62939	GMF63939	R2.0	16.0	16	22	55	109	15.0
GMF62940	GMF63940	R3.0	16.0	16	22	55	109	15.0

Unit : mm

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12: h6

► NEXT PAGE


</

◎ : Excellent ○ : Good

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE CORNER RADIUS WITH NECK

GMF62 PLAIN SHANK
GMF63 FLAT SHANK

- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

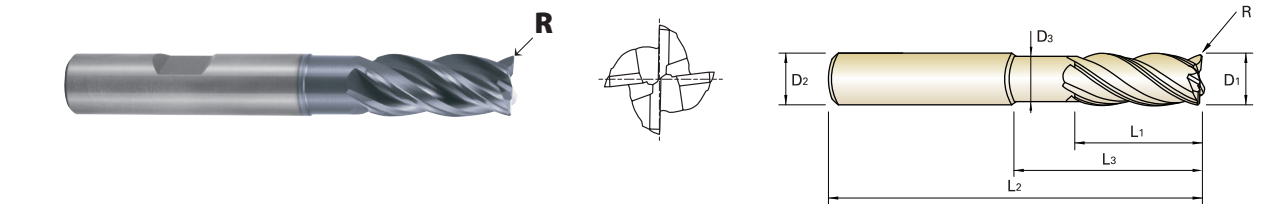

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62941	GMF63941	R1.0	16.0	16	22	87	141	15.0
GMF62942	GMF63942	R2.0	16.0	16	22	87	141	15.0
GMF62943	GMF63943	R3.0	16.0	16	22	87	141	15.0
GMF62200	GMF63200	R1.0	20.0	20	26	50	104	19.0
GMF62944	GMF63944	R2.0	20.0	20	26	50	104	19.0
GMF62945	GMF63945	R3.0	20.0	20	26	50	104	19.0
GMF62946	GMF63946	R1.0	20.0	20	26	70	124	19.0
GMF62947	GMF63947	R2.0	20.0	20	26	70	124	19.0
GMF62948	GMF63948	R3.0	20.0	20	26	70	124	19.0
GMF62949	GMF63949	R1.0	20.0	20	26	110	164	19.0
GMF62950	GMF63950	R2.0	20.0	20	26	110	164	19.0
GMF62951	GMF63951	R3.0	20.0	20	26	110	164	19.0

Unit : mm

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12: h6

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended											○	○	○	○	○	○	○						

◎ : Excellent ○ : Good

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH

GMF52 PLAIN SHANK
GMF53 FLAT SHANK


- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

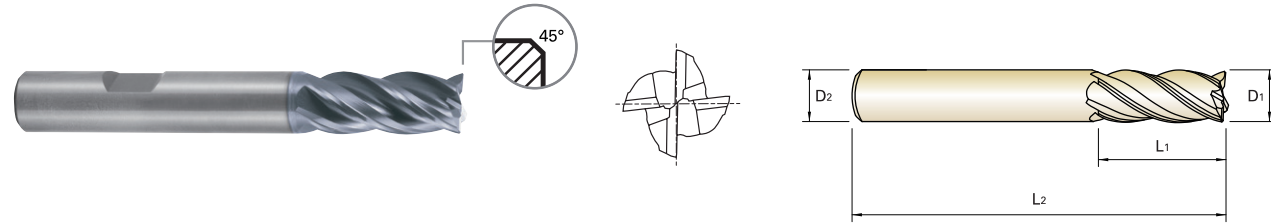

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF52030	GMF53030	3.0	6	7	54	0.10
GMF52040	GMF53040	4.0	6	8	54	0.15
GMF52050	GMF53050	5.0	6	10	54	0.15
GMF52060	GMF53060	6.0	6	10	54	0.20
GMF52080	GMF53080	8.0	8	12	58	0.20
GMF52100	GMF53100	10.0	10	14	66	0.30
GMF52120	GMF53120	12.0	12	16	73	0.35
GMF52140	GMF53140	14.0	14	18	75	0.40
GMF52160	GMF53160	16.0	16	22	82	0.40
GMF52180	GMF53180	18.0	18	24	84	0.50
GMF52200	GMF53200	20.0	20	26	92	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12: h6




◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○	○	○	○	○	○	○				

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH

GMF56 PLAIN SHANK
GMF57 FLAT SHANK


- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

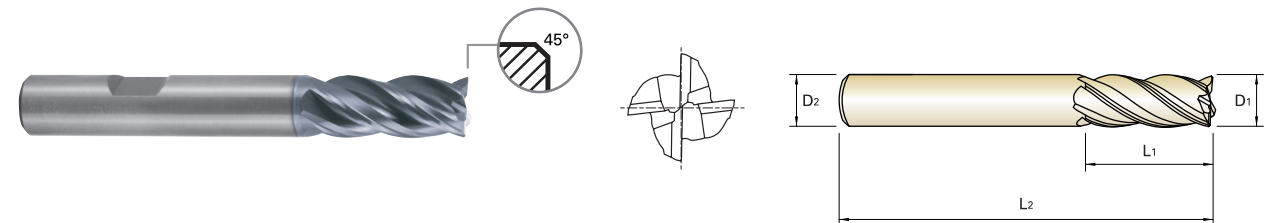

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF56030	GMF57030	3.0	6	8	57	0.10
GMF56040	GMF57040	4.0	6	11	57	0.15
GMF56050	GMF57050	5.0	6	13	57	0.15
GMF56060	GMF57060	6.0	6	13	57	0.20
GMF56080	GMF57080	8.0	8	19	63	0.20
GMF56100	GMF57100	10.0	10	22	72	0.30
GMF56120	GMF57120	12.0	12	26	83	0.35
GMF56140	GMF57140	14.0	14	26	83	0.40
GMF56160	GMF57160	16.0	16	32	92	0.40
GMF56180	GMF57180	18.0	18	32	92	0.50
GMF56200	GMF57200	20.0	20	38	104	0.50
GMF56250	GMF57250	25.0	25	38	104	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12: h6

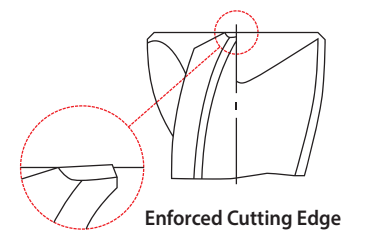


◎ : Excellent ○ : Good

ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○	○	○	○	○	○	○				

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE with EXTENDED NECK

GMF60 PLAIN SHANK
GMF61 FLAT SHANK


- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

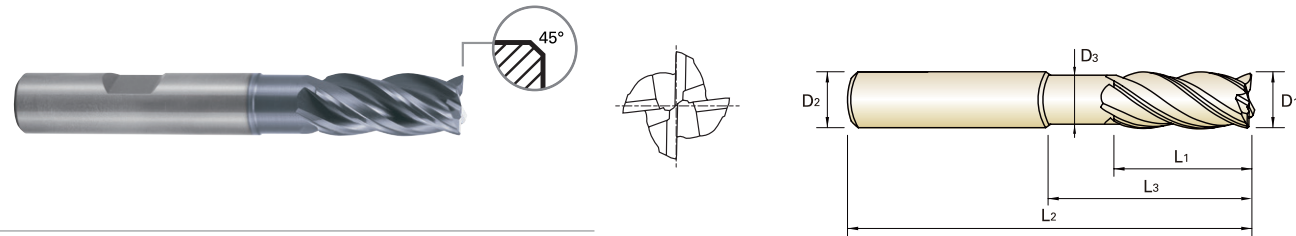

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Chamfer
PLAIN	FLAT	D1	D2	L1	L3	L2	D3	
GMF60030	GMF61030	3.0	6	7	12	54	2.7	0.10
GMF60901	GMF61901	3.0	6	7	17	57	2.7	0.10
GMF60902	GMF61902	3.0	6	8	14	57	2.7	0.10
GMF60040	GMF61040	4.0	6	8	15	57	3.7	0.15
GMF60903	GMF61903	4.0	6	8	22	63	3.7	0.15
GMF60904	GMF61904	4.0	6	11	16	57	3.7	0.15
GMF60050	GMF61050	5.0	6	10	17	57	4.7	0.15
GMF60905	GMF61905	5.0	6	10	27	67	4.7	0.15
GMF60906	GMF61906	5.0	6	13	18	57	4.7	0.15
GMF60060	GMF61060	6.0	6	10	15	57	5.5	0.20
GMF60907	GMF61907	6.0	6	10	20	62	5.5	0.20
GMF60908	GMF61908	6.0	6	10	32	74	5.5	0.20
GMF60909	GMF61909	6.0	6	13	21	57	5.5	0.20
GMF60080	GMF61080	8.0	8	12	20	63	7.5	0.20
GMF60910	GMF61910	8.0	8	12	30	73	7.5	0.20
GMF60911	GMF61911	8.0	8	12	46	90	7.5	0.20
GMF60912	GMF61912	8.0	8	19	27	63	7.5	0.20
GMF60100	GMF61100	10.0	10	14	25	72	9.2	0.30
GMF60913	GMF61913	10.0	10	14	35	82	9.2	0.30
GMF60914	GMF61914	10.0	10	14	55	102	9.2	0.30
GMF60915	GMF61915	10.0	10	22	32	72	9.2	0.30

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12: h6



Enforced Cutting Edge

◎ : Excellent ○ : Good


ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	23	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO	N										S										H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast iron	Hardened Cast iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100		75	90	130	110	90	100		200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended											○	○	○	○	○	○	○	○	○	○	○		

HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE with EXTENDED NECK

GMF60 PLAIN SHANK
GMF61 FLAT SHANK


- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

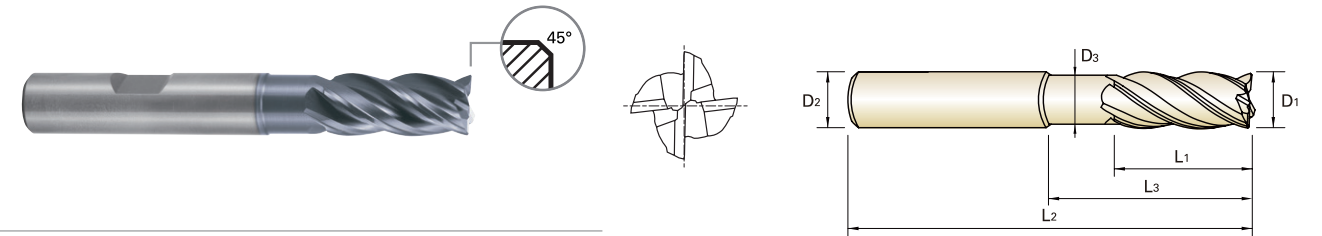

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Chamfer
PLAIN	FLAT	D1	D2	L1	L3	L2	D3	
GMF60120	GMF61120	12.0	12	16	30	83	11.0	0.35
GMF60916	GMF61916	12.0	12	16	40	93	11.0	0.35
GMF60917	GMF61917	12.0	12	16	64	117	11.0	0.35
GMF60918	GMF61918	12.0	12	26	38	83	11.0	0.35
GMF60160	GMF61160	16.0	16	22	38	92	15.0	0.40
GMF60919	GMF61919	16.0	16	22	55	109	15.0	0.40
GMF60920	GMF61920	16.0	16	22	87	141	15.0	0.40
GMF60921	GMF61921	16.0	16	32	44	92	15.0	0.40
GMF60200	GMF61200	20.0	20	26	50	104	19.0	0.50
GMF60922	GMF61922	20.0	20	26	70	124	19.0	0.50
GMF60923	GMF61923	20.0	20	26	110	164	19.0	0.50
GMF60924	GMF61924	20.0	20	38	54	104	19.0	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12: h6

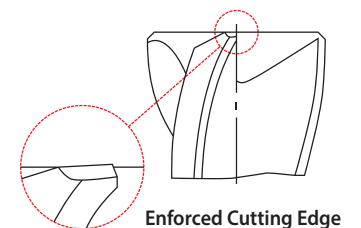

Enforced Cutting Edge

◎ : Excellent ○ : Good


ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloy steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO	N										S										H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
HRC											15	30	25	38	34			55	60	42	55					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
Recommended											○	○	○	○	○	○	○	○	○							

HIGH PERFORMANCE SOLID CARBIDE END MILLS 6 FLUTE CORNER RADIUS LONG LENGTH

GMG16 PLAIN SHANK
GMG17 FLAT SHANK

- The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

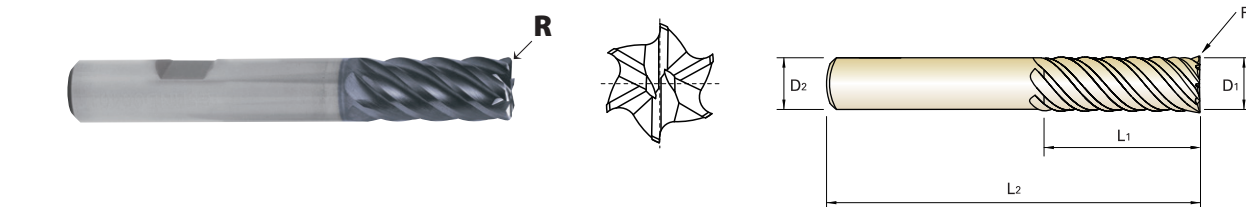

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG16060	GMG17060	R0.5	6.0	6	13	57
GMG16901	GMG17901	R1.0	6.0	6	13	57
GMG16080	GMG17080	R0.5	8.0	8	19	63
GMG16902	GMG17902	R1.0	8.0	8	19	63
GMG16100	GMG17100	R0.5	10.0	10	22	72
GMG16903	GMG17903	R1.0	10.0	10	22	72
GMG16904	GMG17904	R1.5	10.0	10	22	72
GMG16905	GMG17905	R2.0	10.0	10	22	72
GMG16120	GMG17120	R0.5	12.0	12	26	83
GMG16906	GMG17906	R1.0	12.0	12	26	83
GMG16907	GMG17907	R1.5	12.0	12	26	83
GMG16908	GMG17908	R2.0	12.0	12	26	83
GMG16909	GMG17909	R3.0	12.0	12	26	83
GMG16160	GMG17160	R1.0	16.0	16	32	92
GMG16910	GMG17910	R1.5	16.0	16	32	92
GMG16911	GMG17911	R2.0	16.0	16	32	92
GMG16912	GMG17912	R3.0	16.0	16	32	92
GMG16200	GMG17200	R1.0	20.0	20	38	104
GMG16913	GMG17913	R1.5	20.0	20	38	104
GMG16914	GMG17914	R2.0	20.0	20	38	104
GMG16915	GMG17915	R3.0	20.0	20	38	104
GMG16250	GMG17250	R1.0	25.0	25	44	104
GMG16916	GMG17916	R1.5	25.0	25	44	104
GMG16917	GMG17917	R2.0	25.0	25	44	104
GMG16918	GMG17918	R3.0	25.0	25	44	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5 * Shank Dia. ≥ Ø12: h6
Over Ø12	0 ~ - 0.03	


◎ : Excellent ○ : Good

ISO	P										M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32		29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended											○	○	○	○	○	○	○					

HIGH PERFORMANCE SOLID CARBIDE END MILLS 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

GMG18 PLAIN SHANK
GMG19 FLAT SHANK

- The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

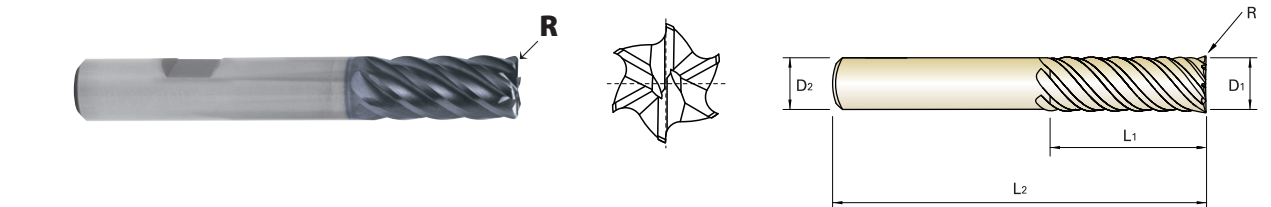

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG18060	GMG19060	R0.5	6.0	6	24	75
GMG18901	GMG19901	R1.0	6.0	6	24	75
GMG18080	GMG19080	R0.5	8.0	8	32	75
GMG18902	GMG19902	R1.0	8.0	8	32	75
GMG18903	GMG19903	R2.0	8.0	8	32	75
GMG18100	GMG19100	R0.5	10.0	10	40	100
GMG18904	GMG19904	R1.0	10.0	10	40	100
GMG18905	GMG19905	R1.5	10.0	10	40	100
GMG18906	GMG19906	R2.0	10.0	10	40	100
GMG18120	GMG19120	R0.5	12.0	12	48	120
GMG18907	GMG19907	R1.0	12.0	12	48	120
GMG18908	GMG19908	R1.5	12.0	12	48	120
GMG18909	GMG19909	R2.0	12.0	12	48	120
GMG18910	GMG19910	R3.0	12.0	12	48	120
GMG18160	GMG19160	R1.0	16.0	16	64	140
GMG18911	GMG19911	R1.5	16.0	16	64	140
GMG18912	GMG19912	R2.0	16.0	16	64	140
GMG18913	GMG19913	R3.0	16.0	16	64	140
GMG18200	GMG19200	R1.0	20.0	20	80	150
GMG18914	GMG19914	R1.5	20.0	20	80	150
GMG18915	GMG19915	R2.0	20.0	20	80	150
GMG18916	GMG19916	R3.0	20.0	20	80	150
GMG18917	GMG19917	R4.0	20.0	20	80	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12: h6

◎ : Excellent ○ : Good


ISO	P										M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎		◎	◎	◎		◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast iron	Hardened Cast iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○	○	○	○	○	○	○				

HIGH PERFORMANCE SOLID CARBIDE END MILLS 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

GMG18 PLAIN SHANK
GMG19 FLAT SHANK

- The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

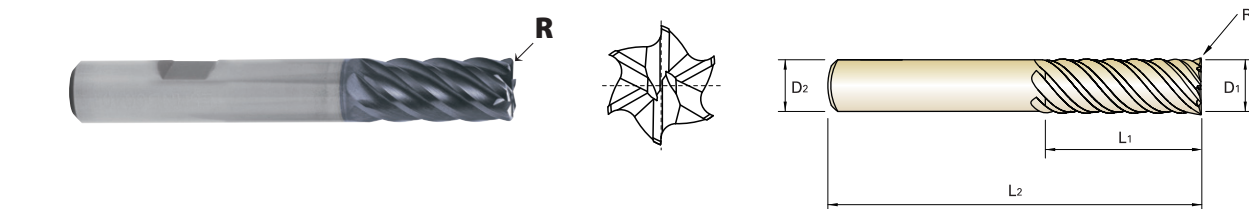

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG18918	GMG19918	R5.0	20.0	20	80	150
GMG18250	GMG19250	R1.0	25.0	25	100	170
GMG18919	GMG19919	R1.5	25.0	25	100	170
GMG18920	GMG19920	R2.0	25.0	25	100	170
GMG18921	GMG19921	R3.0	25.0	25	100	170
GMG18922	GMG19922	R4.0	25.0	25	100	170
GMG18923	GMG19923	R5.0	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12: h6


HIGH PERFORMANCE SOLID CARBIDE END MILLS 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER

NEW

GMH58 PLAIN SHANK
GMH59 FLAT SHANK

Launching Jan of 2020

- Special chip splitter design for better chip removal shortened chip length at high axial machining
- High Performance for Steels, Stainless Steels and Cast Iron

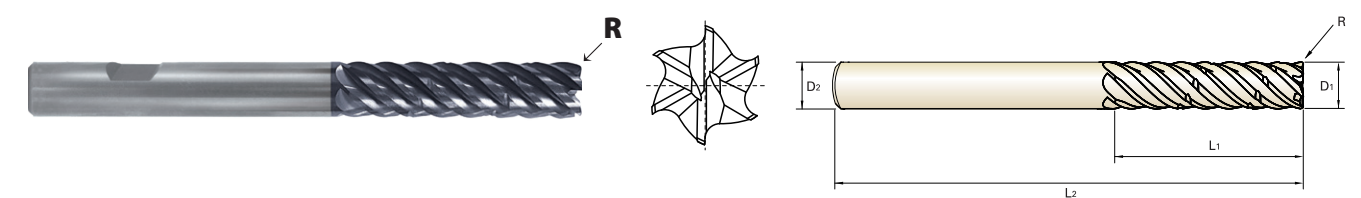

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMH58060	GMH59060	R0.5	6.0	6	24	75
GMH58901	GMH59901	R1.0	6.0	6	24	75
GMH58080	GMH59080	R0.5	8.0	8	32	75
GMH58902	GMH59902	R1.0	8.0	8	32	75
GMH58903	GMH59903	R2.0	8.0	8	32	75
GMH58100	GMH59100	R0.5	10.0	10	40	100
GMH58904	GMH59904	R1.0	10.0	10	40	100
GMH58905	GMH59905	R1.5	10.0	10	40	100
GMH58906	GMH59906	R2.0	10.0	10	40	100
GMH58120	GMH59120	R0.5	12.0	12	48	120
GMH58907	GMH59907	R1.0	12.0	12	48	120
GMH58908	GMH59908	R1.5	12.0	12	48	120
GMH58909	GMH59909	R2.0	12.0	12	48	120
GMH58910	GMH59910	R3.0	12.0	12	48	120
GMH58160	GMH59160	R1.0	16.0	16	64	140
GMH58911	GMH59911	R1.5	16.0	16	64	140
GMH58912	GMH59912	R2.0	16.0	16	64	140
GMH58913	GMH59913	R3.0	16.0	16	64	140
GMH58200	GMH59200	R1.0	20.0	20	80	150
GMH58914	GMH59914	R1.5	20.0	20	80	150
GMH58915	GMH59915	R2.0	20.0	20	80	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12: h6

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K			
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel				Stainless steel		Grey cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S				H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	40	41	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550
Recommended											○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good

ISO	P										M				K			
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel				Stainless steel		Grey cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S				H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	40	41	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550
Recommended											○	○	○	○	○	○	○	○

HIGH PERFORMANCE SOLID CARBIDE END MILLS 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER


NEW

GMH58 PLAIN SHANK

GMH59 FLAT SHANK

Launching Jan of 2020

- Special chip splitter design for better chip removal shortened chip length at high axial machining
- High Performance for Steels, Stainless Steels and Cast Iron

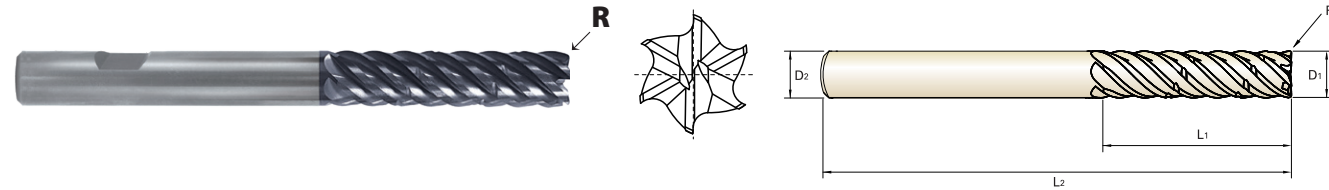

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut		Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2	
GMH58916	GMH59916	R3.0	20.0	20	80	150	
GMH58917	GMH59917	R4.0	20.0	20	80	150	
GMH58918	GMH59918	R5.0	20.0	20	80	150	
GMH58250	GMH59250	R1.0	25.0	25	100	170	
GMH58919	GMH59919	R1.5	25.0	25	100	170	
GMH58920	GMH59920	R2.0	25.0	25	100	170	
GMH58921	GMH59921	R3.0	25.0	25	100	170	
GMH58922	GMH59922	R4.0	25.0	25	100	170	
GMH58923	GMH59923	R5.0	25.0	25	100	170	


Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12: h6

HIGH PERFORMANCE SOLID CARBIDE END MILLS 6 FLUTE LONG LENGTH

GMG12 PLAIN SHANK

GMG13 FLAT SHANK


- The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

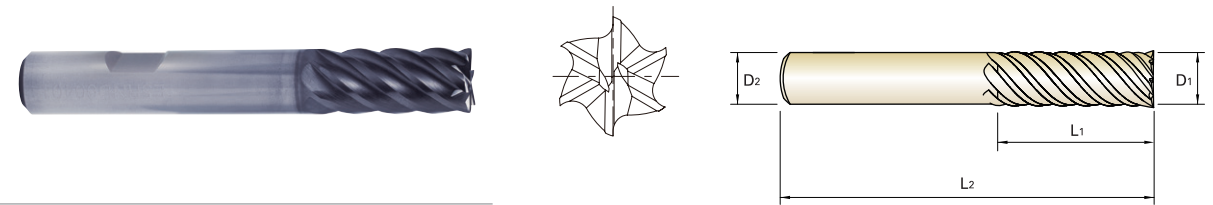

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut		Overall Length
PLAIN	FLAT	D1	D2	L1	L2	
GMG12060	GMG13060	6.0	6	13	57	
GMG12080	GMG13080	8.0	8	19	63	
GMG12100	GMG13100	10.0	10	22	72	
GMG12120	GMG13120	12.0	12	26	83	
GMG12160	GMG13160	16.0	16	32	92	
GMG12200	GMG13200	20.0	20	38	104	
GMG12250	GMG13250	25.0	25	44	104	

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12: h6

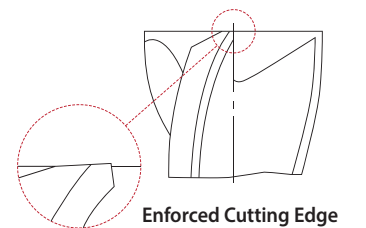

◎ : Excellent ○ : Good

ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○	○	○	○	○	○	○				


◎ : Excellent ○ : Good

ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast iron	Hardened Cast iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○	○	○	○	○	○	○				

HIGH PERFORMANCE SOLID CARBIDE END MILLS 6 FLUTE EXTRA LONG LENGTH

GMG14 PLAIN SHANK
GMG15 FLAT SHANK


- The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

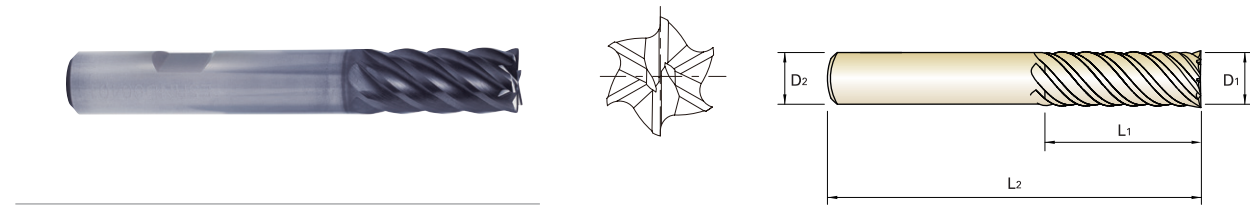

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
GMG14060	GMG15060	6.0	6	24	75
GMG14080	GMG15080	8.0	8	32	75
GMG14100	GMG15100	10.0	10	40	100
GMG14120	GMG15120	12.0	12	48	120
GMG14160	GMG15160	16.0	16	64	140
GMG14200	GMG15200	20.0	20	80	150
GMG14250	GMG15250	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12: h6



◎ : Excellent ○ : Good


ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloy steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎			
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended											○	○	○	○	○	○	○						

HIGH PERFORMANCE SOLID CARBIDE END MILLS 6 FLUTE EXTRA LONG LENGTH CHIP SPLITTER

NEW
GMH56 PLAIN SHANK
GMH57 FLAT SHANK

Launching Jan of 2020


- Special chip splitter design for better chip removal shortened chip length at high axial machining
- High Performance for Steels, Stainless Steels and Cast Iron

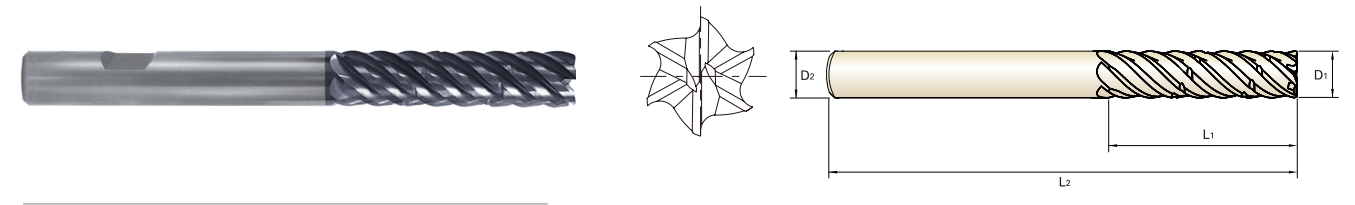

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
GMH56060	GMH57060	6.0	6	24	75
GMH56080	GMH57080	8.0	8	32	75
GMH56100	GMH57100	10.0	10	40	100
GMH56120	GMH57120	12.0	12	48	120
GMH56160	GMH57160	16.0	16	64	140
GMH56200	GMH57200	20.0	20	80	150
GMH56250	GMH57250	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12: h6

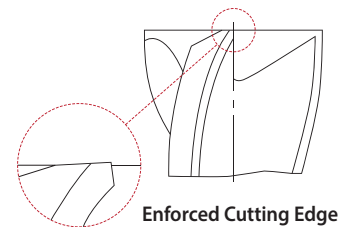

◎ : Excellent ○ : Good

ISO	P										M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○	○	○	○	○	○	○				


GMF52, GMF54, GMF56, GMF58, GMF60, GMF62, GMF53, GMF55, GMF57, GMF59, GMF61, GMF63 SERIES

4 FLUTE - SIDE & SLOTTING


Vc = m/min.
RPM = rev./min. fz = mm/tooth
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae		Ap		Parameter	Diameter (Ø)												
			Side	Slotting	Side	Slotting		3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	25.0	
P	1-4	Non-alloy steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	152	152	152	152	152	168	168	168	168	168	168	168	
							fz	0.005	0.008	0.011	0.016	0.027	0.038	0.047	0.049	0.053	0.059	0.065	0.064	
	5		0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	RPM	16128	12096	9677	8064	6048	5348	4456	3820	3342	2971	2674	2139	
							FEED	323	387	426	516	653	813	838	749	709	701	695	548	
	6-7	Low alloy steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	107	107	107	107	107	117	117	117	117	117	117	117	
							fz	0.005	0.008	0.011	0.016	0.027	0.038	0.047	0.049	0.053	0.059	0.065	0.064	
	8-9		0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	RPM	11353	8515	6812	5677	4257	3724	3104	2660	2328	2069	1862	1490	
							FEED	227	272	300	363	460	566	583	521	493	488	484	381	
	10-11.1	High alloyed steel, and tool steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	152	152	152	152	152	168	168	168	168	168	168	168	
							fz	0.005	0.008	0.011	0.016	0.027	0.038	0.047	0.049	0.053	0.059	0.065	0.064	
M	12-13		0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	RPM	16128	12096	9677	8064	6048	5348	4456	3820	3342	2971	2674	2139	
							FEED	323	387	426	516	653	813	838	749	709	701	695	548	
	14.1	Stainless steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	107	107	107	107	107	117	117	117	117	117	117		
							fz	0.005	0.008	0.013	0.018	0.028	0.048	0.055	0.059	0.062	0.07	0.077	0.077	
	14.2		0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	RPM	11247	8435	6748	5623	4218	3374	2812	2410	2109	1874	1687	1350	
							FEED	225	270	351	405	472	648	619	569	523	525	520	416	
	K	15-20	Grey cast iron	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	95	95	95	95	95	95	95	95	95	95	95	95
								fz	0.005	0.008	0.013	0.018	0.028	0.048	0.055	0.059	0.062	0.069	0.076	0.076
		31-35	Heat Resistant Super Alloys	0.25D	1.0D	1.0D	0.5D	RPM	10080	7560	6048	5040	3780	3024	2520	2160	1890	1680	1512	1210
								FEED	202	242	314	363	423	581	554	510	469	464	460	368
36-37		Titanium Alloys	0.4D	1.0D	1.0D	0.5D	Vc	112	112	112	112	112	123	123	123	123	123	123	123	
							fz	0.006	0.01	0.014	0.02	0.034	0.048	0.058	0.061	0.065	0.073	0.081	0.079	
S		31-35	Heat Resistant Super Alloys	0.25D	1.0D	1.0D	0.5D	RPM	11884	8913	7130	5942	4456	3915	3263	2797	2447	2175	1958	1566
								FEED	285	357	399	475	606	752	757	682	636	635	634	495
S		31-35	Heat Resistant Super Alloys	0.25D	1.0D	1.0D	0.5D	Vc	26	26	26	26	26	26	26	26	26	26	26	26
								fz	0.005	0.007	0.008	0.012	0.019	0.033	0.038	0.04	0.043	0.048	0.054	0.052
S	36-37	Titanium Alloys	0.4D	1.0D	1.0D	0.5D	RPM	2759	2069	1655	1379	1035	828	690	591	517	460	414	331	
							FEED	55	58	53	66	79	109	105	95	89	88	89	69	
S	36-37	Titanium Alloys	0.4D	1.0D	1.0D	0.5D	Vc	58	58	58	58	58	58	58	58	58	58	58	58	
							fz	0.004	0.007	0.011	0.016	0.025	0.042	0.05	0.053	0.055	0.062	0.068	0.069	
S	36-37	Titanium Alloys	0.4D	1.0D	1.0D	0.5D	RPM	6154	4615	3692	3077	2308	1846	1538	1319	1154	1026	923	738	
							FEED	98	129	162	197	231	310	308	280	254	254	251	204	

*() : Short length & Neck type




Slotting



Side Cutting

(*) : If product's Length of Cut(L.O.C) is below 2D, it must be applied L.O.C x 90%



GMG16, GMG18, GMG12, GMG14, GMG17, GMG19, GMG13, GMG15 SERIES

6 FLUTE - SIDE CUTTING

Vc = m/min.
RPM = rev./min. fz = mm/tooth
FEED = mm/min.


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	2.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5		0.05D	2.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	6-7	Low alloy steel	0.05D	2.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9		0.05D	2.0D	Vc	205	205	205	205	205	205	205
fz					0.050	0.085	0.106	0.128	0.149	0.167	0.174	
RPM					10876	8157	6525	5438	4078	3263	2610	
FEED					3263	4160	4150	4176	3646	3269	2725	
10-11.1	High alloyed steel, and tool steel	0.05D	2.0D	Vc	100	100	100	100	100	100	100	
				fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144	
				RPM	5305	3979	3183	2653	1989	1592	1273	
				FEED	1305	1695	1681	1671	1468	1308	1100	
M	12-13		0.05D	2.0D	Vc	215	215	215	215	215	215	215
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11406	8555	6844	5703	4277	3422	2737
					FEED	3353	4312	4270	4277	3747	3326	2759
	14.1	Stainless steel	0.05D	2.0D	Vc	145	145	145	145	145	145	145
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7692	5769	4615	3846	2885	2308	1846
					FEED	1892	2458	2437	2423	2129	1897	1584
	14.2		0.05D	2.0D	Vc	135	135	135	135	135	135	135
fz					0.041	0.071	0.088	0.105	0.123	0.137	0.142	
				RPM	7162	5371	4297	3581	2686	2149	1719	
				FEED	1762	2288	2269	2256	1982	1766	1464	
K	15-20	Grey cast iron	0.05D	2.0D	Vc	225	225	225	225	225	225	225
					fz	0.082	0.139	0.173	0.208	0.242	0.270	0.278
					RPM	11937	8952	7162	5968	4476	3581	2865
					FEED	5844	7477	7426	7434	6510	5801	4785
S	31-35	Heat Resistant Super Alloys	0.05D	2.0D	Vc	35	35	35	35	35	35	35
					fz	0.033	0.055	0.070	0.082	0.097	0.112	0.115
					RPM	1857	1393	1114	928	696	557	446
					FEED	368	460	468	457	405	374	307
	36-37	Titanium Alloys	0.05D	2.0D	Vc	115	115	115	115	115	115	115
					fz	0.033	0.055	0.070	0.083	0.097	0.113	0.117
					RPM	6101	4576	3661	3050	2288	1830	1464
					FEED	1208	1510	1537	1519	1332	1241	1028

GMH58, GMH59, GMH56, GMH57 SERIES

6 FLUTE CHIP SPLITTER - SIDE CUTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5	Low alloy steel	0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	6-7	Low alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9	Low alloy steel	0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	10-11.1	High alloyed steel, and tool steel	0.05D	3.0D	Vc	100	100	100	100	100	100	100
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144
					RPM	5305	3979	3183	2653	1989	1592	1273
					FEED	1305	1695	1681	1671	1468	1308	1100
M	12-13	Stainless steel	0.05D	3.0D	Vc	215	215	215	215	215	215	215
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11406	8555	6844	5703	4277	3422	2737
					FEED	3353	4312	4270	4277	3747	3326	2759
	14.1	Stainless steel	0.05D	3.0D	Vc	145	145	145	145	145	145	145
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7692	5769	4615	3846	2885	2308	1846
					FEED	1892	2458	2437	2423	2129	1897	1584
	14.2	Stainless steel	0.05D	3.0D	Vc	135	135	135	135	135	135	135
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.142
					RPM	7162	5371	4297	3581	2686	2149	1719
					FEED	1762	2288	2269	2256	1982	1766	1464
K	15-20	Grey cast iron	0.05D	3.0D	Vc	225	225	225	225	225	225	225
					fz	0.082	0.139	0.173	0.208	0.242	0.270	0.278
					RPM	11937	8952	7162	5968	4476	3581	2865
					FEED	5844	7477	7426	7434	6510	5801	4785
S	31-35	Heat Resistant Super Alloys	0.05D	3.0D	Vc	35	35	35	35	35	35	35
					fz	0.033	0.055	0.070	0.082	0.097	0.112	0.115
					RPM	1857	1393	1114	928	696	557	446
					FEED	368	460	468	457	405	374	307
	36-37	Titanium Alloys	0.05D	3.0D	Vc	115	115	115	115	115	115	115
					fz	0.033	0.055	0.070	0.083	0.097	0.113	0.117
					RPM	6101	4576	3661	3050	2288	1830	1464
					FEED	1208	1510	1537	1519	1332	1241	1028



EMB72, EMB73 SERIES

5 FLUTE - SIDE CUTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	14.0	16.0	20.0
P	1-2	Non-alloy steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
	6	Low alloy steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
	10	High alloyed steel, and tool steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
M	12-13	Stainless steel	0.25D	1.25D	Vc	105	105	105	145	105	105	105
					fz	0.030	0.032	0.038	0.043	0.064	0.068	0.076
					RPM	5570	4178	3342	3846	2387	2089	1671
					FEED	836	668	635	827	764	710	635
	14.1	Stainless steel	0.25D	1.25D	Vc	115	115	115	115	115	115	115
					fz	0.030	0.032	0.038	0.063	0.065	0.069	0.076
					RPM	6101	4576	3661	3050	2615	2288	1830
					FEED	915	732	696	961	850	789	696
K	15-20	Grey cast iron	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
S	31-35	Heat Resistant Super Alloys	0.25D	1.0D	Vc	25	25	25	25	25	25	25
					fz	0.017	0.020	0.025	0.036	0.045	0.048	0.060
					RPM	1326	995	796	663	568	497	398
					FEED	113	99	99	119	128	119	119
	36-37	Titanium Alloys	0.25D	1.25D	Vc	85	85	85	85	85	85	85
					fz	0.030	0.031	0.038	0.050	0.057	0.063	0.075
					RPM	4509	3382	2706	2255	1933	1691	1353
					FEED	676	524	514	564	551	533	507

