

STUB


HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS

● HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
● Forets HPD-SUS HSS-E pour INOX, série extra-courte
● PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX


EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

►Application : Designed for drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.
►Advantage : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling
Wide flute and stub length-increasing chip removal and reducing vibration and deflection.
High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

►Anwendung : Geeignet zum Bearbeiten von rostfreier stähle, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierungen usw.
►Vorteile : Durch hohen Helix wird Spanstau vermieden, geeignet zum Hochleistungsbohren, durch die breiten Schneiden und die kurze Ausführung wird die Spanabfuhr erhöht und Vibrationen und Stoß reduziert. Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.



four facet

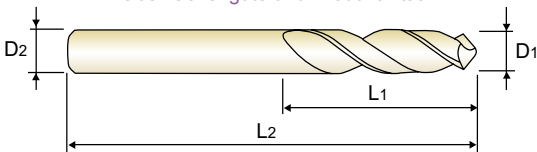

D1=D2



p.A189



Plain Shank

Page

ER COLLET CHUCK

D73 - 115

up to 4mm over 4mm

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
DJ543020	2.00	12	44
DJ543021	2.10	12	44
DJ543022	2.20	13	45
DJ543023	2.30	13	45
DJ543024	2.40	14	46
DJ543025	2.50	14	46
DJ543026	2.60	14	46
DJ543027	2.70	16	48
DJ543028	2.80	16	48
DJ543029	2.90	16	48
DJ543030	3.00	16	48
DJ543031	3.10	18	50
DJ543032	3.20	18	50
DJ543033	3.30	18	50
DJ543034	3.40	20	52
DJ543035	3.50	20	52
DJ543036	3.60	20	52
DJ543037	3.70	20	52
DJ543038	3.80	22	54
DJ543039	3.90	22	54
DJ543040	4.00	22	54
DJ543041	4.10	22	66

EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D1	L1	L2
DJ543042	4.20	22	66
DJ543043	4.30	24	68
DJ543044	4.40	24	68
DJ543045	4.50	24	68
DJ543046	4.60	24	68
DJ543047	4.70	24	68
DJ543048	4.80	26	70
DJ543049	4.90	26	70
DJ543050	5.00	26	70
DJ543051	5.10	26	70
DJ543052	5.20	26	70
DJ543053	5.30	26	70
DJ543054	5.40	28	72
DJ543055	5.50	28	72
DJ543056	5.60	28	72
DJ543057	5.70	28	72
DJ543058	5.80	28	72
DJ543059	5.90	28	72
DJ543060	6.00	28	72
DJ543061	6.10	31	75
DJ543062	6.20	31	75
DJ543063	6.30	31	75

► TiCN(DW543), TiAlN(DY543) are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	○											◎	○	◎									
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast iron		Hardened Cast iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	◎	◎				○																	



DJ543 SERIES

HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS

🇪🇺 HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
🇫🇷 Forets HPD-SUS HSS-E pour INOX, série extra-courte
🇮🇹 PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX

STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

►Application : Designed for drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.


►Advantage : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling
Wide flute and stub length-increasing chip removal and reducing vibration and deflection.
High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

►Anwendung : Geeignet zum Bearbeiten von rostfreier stähle, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierungen usw.

►Vorteile : Durch hohen Helix wird Spanstau vermieden, geeignet zum Hochleistungsbohren, durch die breiten Schneiden und die kurze Ausführung wird die Spanabfuhr erhöht und Vibrationen und Stoß reduziert. Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.



four facet



D₁=D₂

HSS-E

38°

h7

h8

130°

120°

TiN

p.A189

up to 4mm over 4mm



Recommended ToolHolder

Plain Shank

ER COLLET CHUCK

Page

D73 - 115

Unit : mm				Unit : mm			
EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D ₁	L ₁	L ₂	TiN	D ₁	L ₁	L ₂
DJ543064	6.40	31	75	DJ543086	8.60	40	90
DJ543065	6.50	31	75	DJ543087	8.70	40	90
DJ543066	6.60	31	75	DJ543088	8.80	40	90
DJ543067	6.70	31	75	DJ543089	8.90	40	90
DJ543068	6.80	34	78	DJ543090	9.00	40	90
DJ543069	6.90	34	78	DJ543091	9.10	40	90
DJ543070	7.00	34	78	DJ543092	9.20	40	90
DJ543071	7.10	34	78	DJ543093	9.30	40	90
DJ543072	7.20	34	78	DJ543094	9.40	40	90
DJ543073	7.30	34	78	DJ543095	9.50	40	90
DJ543074	7.40	34	78	DJ543096	9.60	43	93
DJ543075	7.50	34	78	DJ543097	9.70	43	93
DJ543076	7.60	37	81	DJ543098	9.80	43	93
DJ543077	7.70	37	81	DJ543099	9.90	43	93
DJ543078	7.80	37	81	DJ543100	10.00	43	93
DJ543079	7.90	37	81	DJ543101	10.10	43	100
DJ543080	8.00	37	81	DJ543102	10.20	43	100
DJ543081	8.10	37	87	DJ543103	10.30	43	100
DJ543082	8.20	37	87	DJ543104	10.40	43	100
DJ543083	8.30	37	87	DJ543105	10.50	43	100
DJ543084	8.40	37	87	DJ543106	10.60	43	100
DJ543085	8.50	37	87	DJ543107	10.70	47	104

► TiCN(DW543), TiAlN(DY543) are available on your request. ► NEXT PAGE

◎ : Excellent ○ : Good																						
ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○											◎	○	◎								
ISO	N										S								H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	◎	◎				○																



DJ543 SERIES

HSS-E, HPD-SUS TWIST DRILLS for STAINLESS STEELS

🇪🇺 HSS-E, HPD-SUS SPIRALBOHRER für ROSTFREIER STÄHLE
🇫🇷 Forets HPD-SUS HSS-E pour INOX, série extra-courte
🇮🇹 PUNTE ELICOIDALI HPD-SUS IN HSS-E, PER ACCIAI INOX

STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

►Application : Designed for drilling stainless steels, mild steels, aluminum, aluminum alloys, aluminum die casting, copper, copper alloys, etc.


►Advantage : High helix-sharp cutting edges to avoid built-up and to be suitable for high performance drilling
Wide flute and stub length-increasing chip removal and reducing vibration and deflection.
High vanadium HSS-E material with superior TiN coating - higher speed and feed, longer tool life
High quality & good surface finish, high productivity.

►Anwendung : Geeignet zum Bearbeiten von rostfreier stähle, Aluminium, Aluminium-Legierungen, Aluminium-Guss, Kupfer, Kupfer-Legierungen usw.

►Vorteile : Durch hohen Helix wird Spanstau vermieden, geeignet zum Hochleistungsbohren, durch die breiten Schneiden und die kurze Ausführung wird die Spanabfuhr erhöht und Vibrationen und Stoß reduziert. Hoch Vanadium HSS-E-Material mit TiN-Beschichtung, höhere Geschwindigkeit und Vorschub, längere Standzeit, verbesserte Oberflächengüte und Produktivität.



four facet

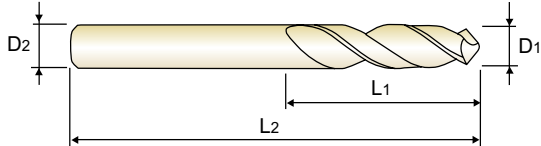

D₁=D₂

HSS-E

38°

h7

h8

130°

120°

TiN

p.A189

up to 4mm over 4mm



Recommended ToolHolder

Plain Shank

ER COLLET CHUCK

Page

D73 - 115

Unit : mm				Unit : mm			
EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
TiN	D ₁	L ₁	L ₂	TiN	D ₁	L ₁	L ₂
DJ543108	10.80	47	104	DJ543120	12.00	51	108
DJ543109	10.90	47	104	DJ543121	12.10	51	108
DJ543110	11.00	47	104	DJ543122	12.20	51	108
DJ543111	11.10	47	104	DJ543123	12.30	51	108
DJ543112	11.20	47	104	DJ543124	12.40	51	108
DJ543113	11.30	47	104	DJ543125	12.50	51	108
DJ543114	11.40	47	104	DJ543126	12.60	51	108
DJ543115	11.50	47	104	DJ543127	12.70	51	108
DJ543116	11.60	47	104	DJ543128	12.80	51	108
DJ543117	11.70	47	104	DJ543129	12.90	51	108
DJ543118	11.80	47	104	DJ543130	13.00	51	108
DJ543119	11.90	51	108				

► TiCN(DW543), TiAlN(DY543) are available on your request.

◎ : Excellent ○ : Good																					
ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○											◎	○	◎							
ISO	N										S								H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast iron	Hardened Cast iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎				○															