


HIGH PERFORMANCE SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH

GMF56 PLAIN SHANK
GMF57 FLAT SHANK


- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40

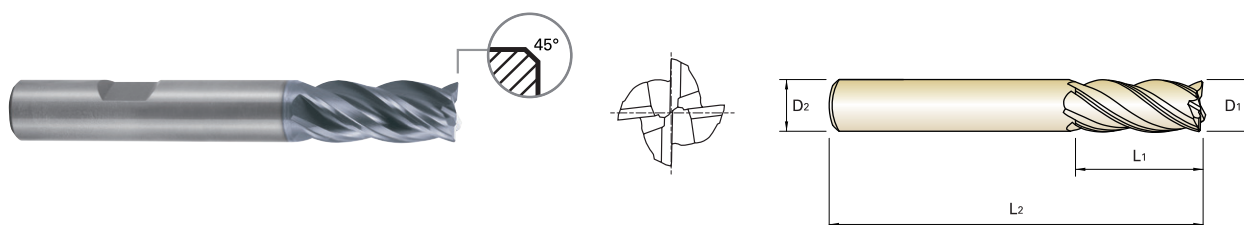

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF56030	GMF57030	3.0	6	8	57	0.10
GMF56040	GMF57040	4.0	6	11	57	0.15
GMF56050	GMF57050	5.0	6	13	57	0.15
GMF56060	GMF57060	6.0	6	13	57	0.20
GMF56080	GMF57080	8.0	8	19	63	0.20
GMF56100	GMF57100	10.0	10	22	72	0.30
GMF56120	GMF57120	12.0	12	26	83	0.35
GMF56140	GMF57140	14.0	14	26	83	0.40
GMF56160	GMF57160	16.0	16	32	92	0.40
GMF56180	GMF57180	18.0	18	32	92	0.50
GMF56200	GMF57200	20.0	20	38	104	0.50
GMF56250	GMF57250	25.0	25	38	104	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5 * Shank Dia. ≥ Ø12: h6
Over Ø12	0 ~ - 0.03	



◎ : Excellent ○ : Good

ISO	P										M						K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast. iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎			
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended											○	○	○	○	○	○	○						