



**X5070
END MILLS**

Rotool

PLAIN SHANK

G8D62 SERIES

CARBIDE, 4 FLUTE BALL NOSE - Center Match



● **VOLLHARTMETALL, 4 SCHNEIDEN STIRNRADIUS - Schneiden Mittelpunkt**

● **Fraise carbure, 4 dents, hémisphérique - coupe au centre**

● **4 TAGLIENTI, SEMISFERICA - 4 TAGLIENTI A CENTRO FRESA**

- ▶ Applied center match type & special new design on ball center shape.
- ▶ Excellent high wear resistance and high performance.
- ▶ Applied for high speed and feed.
- ▶ Increased the surface roughness.

- ▶ Neues Design der Kugelschneidengeometrie
- ▶ Hohe Verschleißfestigkeit, hohe Leistung.
- ▶ Geeignet für hohe Schnittgeschwindigkeiten und hohe Vorschübe
- ▶ verbessert deutlich die Oberflächenrauigkeit

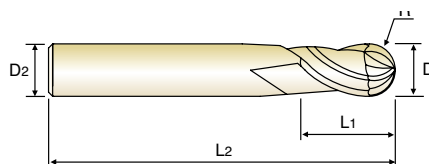

CARBIDE

4

30°

R

R

PLAIN

BLUE

h5

p.C129



Plain Shank	Page
HYDRAULIC CHUCK SHRINK FIT HOLDER	D15-46 D47-72
POWER MILLING CHUCK	D161-176
ER COLLET CHUCK SK SLIM CHUCK	D73-116 D183-201

R1.5-R3 R4-R10

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
G8D62030	R1.5	3.0	6	8	60
G8D62040	R2.0	4.0	6	8	70
G8D62050	R2.5	5.0	6	10	80
G8D62060	R3.0	6.0	6	12	90
G8D62080	R4.0	8.0	8	14	100
G8D62100	R5.0	10.0	10	18	100
G8D62120	R6.0	12.0	12	22	110
G8D62160	R8.0	16.0	16	30	140
G8D62200	R10.0	20.0	20	38	160



Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO	P											M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend					○			○	○		○											
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys			Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend																		◎	◎	○	◎	

YG-1 CO.,LTD.

phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr

C101

CARBIDE

HSS

CBN
END MILLS

i-Xmill
END MILLS

i-SMART
MODULAR
END MILLS

X5070
END MILLS

4G MILL
END MILLS

X-POWER
PRO
END MILLS

TitaNox-
POWER
END MILLS

JET-POWER
END MILLS

V7 PLUS
END MILLS

ALU-POWER
HPC
END MILLS

ALU-
POWER
END MILLS

D-POWER
GRAPHITE
END MILLS

CRX S
END MILLS

K-2
END MILLS

ONLY ONE
COATED PM60
END MILLS

TANK-
POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA