


CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING

 **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN**
 **Fraise carbure, 2 dents, hémisphérique pour usinage de rainure**
 **2 TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE**

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

- ▶ Geeignet zum Fräsen hochgehardeter Stähle.
- ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
- ▶ Excellente Werkstückoberflächen.
- ▶ Geeignet für hochpräzises Fräsen.
- ▶ Höhere Verschleißfestigkeit.

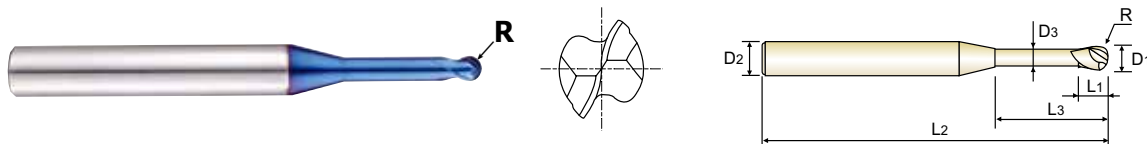

p.C124-125

	Plain Shank	Page
⊙	HYDRAULIC CHUCK SHRINK FIT HOLDER	D15-46 D47-72
⊙	POWER MILLING CHUCK	D161-176
⊙	ER COLLET CHUCK SK SLIM CHUCK	D73-116 D183-201

Recommended
ToolHolder

Unit : mm

EDP No.	Radius of Ball Nose R (±0.005)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3
G8A54005	R0.25	0.5	6	0.5	1.5	50	0.45
G8A54901	R0.25	0.5	6	0.5	3.3	50	0.45
G8A54006	R0.3	0.6	6	0.6	2	50	0.55
G8A54902	R0.3	0.6	6	0.6	4	50	0.55
G8A54008	R0.4	0.8	6	0.8	2.5	50	0.75
G8A54903	R0.4	0.8	6	0.8	5.5	50	0.75
G8A54010	R0.5	1.0	6	1	3.3	50	0.95
G8A54904	R0.5	1.0	6	1	6.7	50	0.95
G8A54905	R0.5	1.0	6	1	12	50	0.95
G8A54012	R0.6	1.2	6	1.2	4.4	50	1.15
G8A54906	R0.6	1.2	6	1.2	8	50	1.15
G8A54015	R0.75	1.5	6	1.5	5	50	1.45
G8A54907	R0.75	1.5	6	1.5	9.7	50	1.45
G8A54908	R0.75	1.5	6	1.5	15	50	1.45
G8A54020	R1.0	2.0	6	2	6	50	1.95
G8A54909	R1.0	2.0	6	2	13	50	1.95
G8A54910	R1.0	2.0	6	2	20	60	1.95



Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good

ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○			○	○		○										
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎