

CARBIDE, 2 FLUTE STUB LENGTH BALL NOSE with EXTENDED NECK

 VOLLHARTMETALL, 2 SCHNEIDEN EXTRA KURZ STIRNRADIUS mit ABGESETZTEM SCHAFTTEIL

 Fraise carbure, 2 dents, hémisphérique, détalonnée, extra-courte

 2 TAGLIENTI, SEMISFERICA TAGLIENTE CORTO CON SCARICO ESTESO

- ▶ Designed to machine high hardened materials.

▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.

▶ Excellent workpiece finish.

▶ Designed for high precision milling operation.


▶ Higher wear-resistance.
- ▶ Geeignet zum Fräsen hochgehärteter Stähle.

▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.

▶ Excellente Werkstückoberflächen.

▶ Geeignet für hochpräzises Fräsen.

▶ Höhere Verschleißfestigkeit.

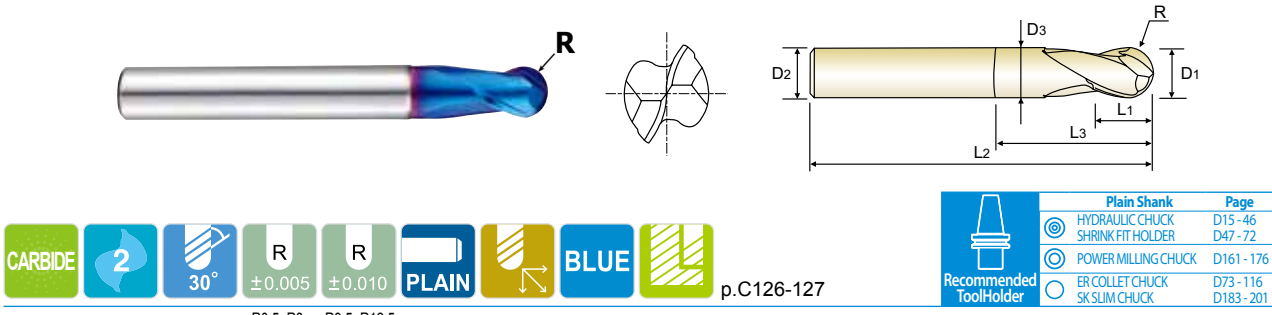

Unit : mm							
EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A38010	R0.5	1.0	4	1	2.2	50	0.95
G8A38012	R0.6	1.2	4	1.2	2.6	50	1.15
G8A38015	R0.75	1.5	4	1.5	3	50	1.45
G8A380204S	R1.0	2.0	4	2	4	50	1.95
G8A38020	R1.0	2.0	6	2	4	50	1.95
G8A38030	R1.5	3.0	6	3	6	60	2.85
G8A38040	R2.0	4.0	6	4	8	70	3.85
G8A38050	R2.5	5.0	6	5	10	80	4.85
G8A38060	R3.0	6.0	6	6	12	90	5.85
G8A38070	R3.5	7.0	8	7	14	90	6.7
G8A38080	R4.0	8.0	8	8	16	100	7.7
G8A38090	R4.5	9.0	10	9	18	100	8.7
G8A38100	R5.0	10.0	10	10	20	100	9.7
G8A38120	R6.0	12.0	12	12	24	110	11.7
G8A38140	R7.0	14.0	14	14	28	110	13.7
G8A38160	R8.0	16.0	16	16	32	140	15.7
G8A38180	R9.0	18.0	18	18	36	140	17.7
G8A38200	R10.0	20.0	20	20	40	160	19.7
G8A38250	R12.5	25.0	25	25	50	180	24.7

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

ISO	P											M				K						◎ : Excellent ○ : Good		
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommend					○			○	○		○													
ISO	N										S						H							
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRC											15	30	25	38	34		37	55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320			400 Rm	1050 Rm	550	630	400	550	
Recommend																		◎	◎	○		◎		